


Custom Shutter.com Installation Instructions
for *Double-Hung using any Mounting Method*

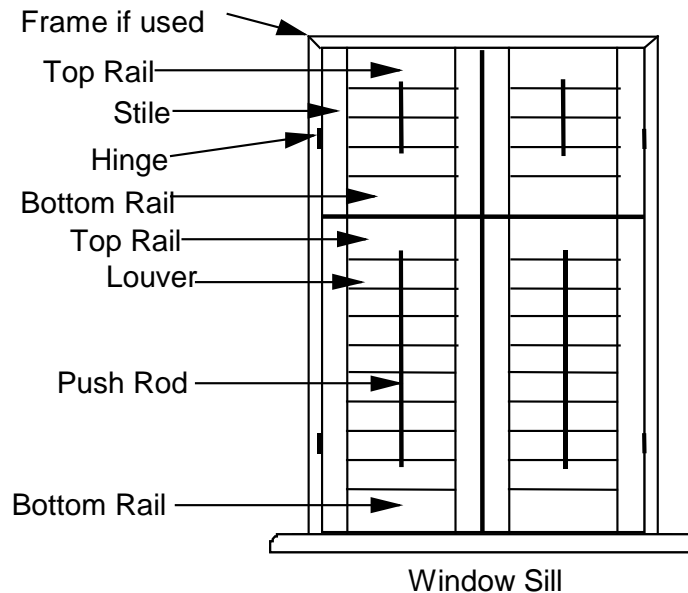

General parts list:

‘Double’ the Shutter panels in correct sizes and numbers to fill the opening in the Width for both the top and bottom sections

Toll-Free Customer Service: 1-800-944-1021

Notes:

1. In double-hung mounts, the shorter panels usually are the “top” panels. Arrange the ‘TOP’ panel sets as shown on your Mount instruction page so that all panels, mounting frames (if used) and hinges are placed together properly for the width and then do the same with the ‘BOTTOM’ panels sets, leaving an 1/8” gap between the top and bottom sets.
2. In this type of double-hung installation, the lengths and miter angles of the mounting strips are cut at the factory. The strips are also pre-drilled & countersunk for mounting screws, and the hinges are attached to the mounting strips at the factory. **In most cases, the side mounting strips are full length for appearance and ease of installation, even though the individual shutter panels are shorter than full length.**
3. Magnet sets are attached at the TOP and the BOTTOM of each opening. Follow your specialized Mount instructions for this.